


RFID Troubleshooting Tool 900 MHz

MD100001




Step 1

Hold the device up to the RFID antenna with the Montie Gear logo facing you. The card responds to RFID portals and readers that have an output of 300 mWatts and up. The distance you are able to detect the RFID signal varies from less than an inch to 12 inches, depending on the antenna output.

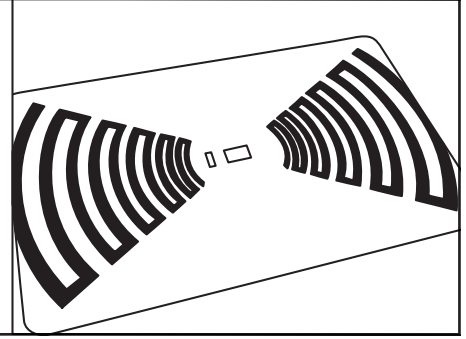

Step 2

Once the card activates, you'll see the LED in middle of the car start to blink. The blinking LED indicates that the antenna is putting out power.

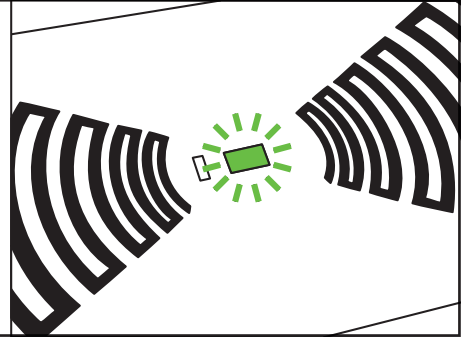

Contact Montie Gear at info@montiegear.com for privately labeled / custom branded devices with your company logo.

Note: This device does not detect RFID tags. This device defects the RFID field that triggers the tags.